

EXTRACTED FROM THE GREATER DIRCOCO REGIONAL CODE OF PRACTICE FOR DRAINAGE WORKS

1. 225MM THICK CL. 20N/20MM MASS CONCRETE FOUNDATIONS.

PREFORMED HALF CIRCLE CHANNEL PIPES. THE PIPELINE MAY, WHERE PRACTICABLE, BE LAID THROUGH THE MANHOLE AND THE CROWN CUT OUT TO HALF DIAMETER, PROVIDED FLEXIBLE JOINTS ARE SITUATED ON EACH SIDE NO FURTHER THAN 600MM FROM THE INNER FACE OF MANHOLE WALL.


MANHOLE CONSTRUCTION. FOR SURFACE WATER MANHOLES HIGH-DENSITY BLOCKS TO CL.S10 OF IS.20 PART 1:1987 OR CL. 30N/20MM IN-SITU CONCRETE.

BLOCK WORK SHALL BE BEDDED AND JOINTED USING MORTAR TO IS406. BEDS AND VERTICAL JOINTS SHALL BE COMPLETELY FILLED WITH MORTAR AS THE BLOCKS ARE

JOINTS SHALL BE FLUSH POINTED AS THE WORK PROCEEDS.

ALL FOUL MANHOLES MUST BE FACED IN SOLID ENGINEERING BRICK (MIN. CLASS A OR B), OR IN-SITU CONCRETE FOR 1 METRE ABOVE BENCHING LEVEL.

- BRICK TO BE BONDED TO BLOCK WORK USING ENGLISH GARDEN WALL BOND. 4. RELIEVING ARCH FORMED BY 215X103X65 SOLID ENGINEERING BRICK CLASS A OR B AS PER DRAWING. RELIEVING ARCHES USED IN BRICK OR BLOCK WORK MANHOLES EXTEND OVER FULL THICKNESS OF WALL. A DOUBLE ARCH IS TO BE
- FORMED FOR PIPE DIAMETERS GREATER THAN 600MM. . BENCHING AND PIPE CHANNEL PIPE SURROUND - CL. 20/20 CONCRETE.
- BENCHING FINISHED IN 2:1 SAND-CEMENT MORTAR WITH A SMOOTH TROWEL FINISH, AT 1 IN 30 SLOPE TOWARDS CHANNEL.
- STANDARD RUNGS AT 300C/C VERTICALLY AND GALVANIZED TO THE LATEST VERSION OFB.S. 729 OR EQUIVALENT. NOTE: STEPS IRONS ARE NOT ACCEPTABLE.
- 8. 600MM SQUARE OPENING IN ROOF SLAB.
- 9. PRECAST R.C. ROOF SLAB SHALL BE 200MM THICK IN CLASS 30N/20MM, WITH 40MM COVER TO STEEL.
- 10. 1 TO 2 COURSES OF SOLID ENGINEERING BRICKS C.L.B TO I.S.91:1983 SET IN 1:3 (CEMENT AND MORTAR).
- 11. CLASS D400 OR E600 MANHOLE COVER AND FRAME TO IS/EN 124. 150MM DEEP FRAME FOR ROADS AND 100MM DEEP FOR FOOTPATHS AND GREEN AREAS. NON-ROCK DESIGN, CLOSED KEYWAYS, MANUFACTURED FROM SPHEROIDAL GRAPHITE CAST IRON (DUCTILE CAST IRON), 600 X 600 (600 DIAM.) CLEAR OPENING, COVER AND FRAME COATED IN BITUMEN OR OTHER APPROVED MATERIAL, COVER TO HAVE A MINIMUM MASS OF 140KG/M2, FRAME BEARING AREA SHALL BE 80,000MM2 MIN, FRAMES SHALL BE DESIGNED TO PREVENT COVERS FALLING INTO MANHOLE. FRAMES SHALL BE BEDDED ON APPROVED MORTAR TO MANUFACTURES INSTRUCTIONS.
- 12. SHORT LENGTH PIPE AND PIPE JOINT EXTERNAL TO MANHOLE SHALL NOT EXCEED 600MM FROM THE INNER FACE OF MANHOLE WALL.
- 13. TOE HOLES OF 230MM MINIMUM DEPTH AND GALVANIZED STEEL SAFETY RAILINGS TO BE PROVIDED IN BENCHING OF SEWERS GREATER THAN 525MM DIAMETER AND DEPTH TO INVERT >3M FOR ACCESS TO INVERT.
- 14. A SAFETY CHAIN IS TO BE PROVIDED ON PIPES THAT EXCEED 450MM IN DIAMETER. MILD SAFETY CHAIN SHALL BE 10MM NOMINAL SIZE GRADE M(H) NON-CALIBRATED CHAIN, TYPE 1, COMPLYING WITH B.S.4942 PART 2 OR FOUIVALENT
- 15. WHEN DEPTH OF MANHOLES TO INVERT IS GREATER THAN 3.0M LADDERS SHALL BE USED INSTEAD OF RUNGS TO B.S.4211 OR EQUIVALENT EXCEPT THAT STRINGERS SHOULD BE NOT LESS THAN 65 X 12MM IN SECTION AND RUNGS 25MM IN DIAMETER. FIXED LADDERS SHOULD MEET THE DIMENSIONAL REQUIREMENTS OF B.S.4211 OR EQUIVALENT.
- 16. LADDER STRINGERS SHOULD BE ADEQUATELY SUPPORTED FROM THE MANHOLE WALL AT INTERVALS OF NOT MORE THAN 2.0M STRINGERS SHOULD BE BOLTED TO CLEATS TO FACILITATE RENEWAL.
- 17. ALL LADDERS, RUNGS, HANDRAILS, SAFETY CHAINS ETC SHALL BE HOT DIP GALVANIZED TO B.S.729 OR EQUIVALENT. 18. PIPE SHOULD BE CUT FLUSH WITH THE INSIDE SURFACE OF THE MANHOLE
- WALL SO THAT THE CHANNEL EXTENDS THE FULL LENGTH OF THE MANHOLE (EXCEPT FOR PRECAST MANHOLES). 19. POSITION OF 910 SQUARE OPENING IN INTERMEDIATE ROOF SLAB.
- ALL MANHOLES SHALL BE WATERTIGHT TO THE SATISFACTION OF THE ENGINEER. FORMWORK TO REINFORCED CONCRETE AND MASS CONCRETE SHALL COMPLY WITH CLASS 2, SECTION 6.2.7, B.S.8110: PART 1: 1997.
- FINISH TO THE TOP OF SLABS SHALL COMPLY WITH TYPE A, SECTION 6.2.7, B.S.8110: PART 1:1997. PLAN DIMENSIONS OF MANHOLES ARE BASED ON BLOCK WORK HAVING A
- COORDINATING SIZE OF 450 X 225 X 100. MANHOLES ARE DESIGNED TO B.S.8005 AND WALL THICKNESS TO LS.325 BLOCK WORK DESIGN CODE TAKING GRANULAR FILL PRESSURE AND H.B. SURCHARGE. REINFORCEMENT TO SLABS TO ENGINEERS DETAILS.
- 20. FOR MANHOLES >3M DEPTH TO INVERT USE 30N/20MM IN-SITU CONCRETE. REINFORCING MESH REF. A393 @ 6.16KG/M TO BE FIXED AT MIDPOINT OF
- WALL. ADDITIONAL REINFORCEMENT TO BE SUPPLIED OVER PIPE CROWN. 21. FOR PRECAST MANHOLES, CHAMBER WALLS AND COVER SLAB TO BE CONSTRUCTED TO IS EN 1917 AND IS 420 2004
- 22. MANHOLE OPENINGS TO BE SITUATED FURTHEST FROM THE NEAREST CARRIAGEWAY. MANHOLE STEPS / ACCESS TO BE POSITIONED TO ALLOW VIEWING OF ONCOMING TRAFFIC.
- 23. FOR BEDDING AND SEALING OF CHAMBER RINGS, THE TOP RING (TO PRECAST COVER SLAB) AND BOTTOM RING TO BE BEDDED WITH CEMENT MORTAR. FOR INTERMEDIATE RINGS, JOINTS TO BE SEALED WITH APPROVED PRE-FORMED
- 24. PRECAST MANHOLES TO BE SURROUNDED WITH A MINIMUM OF 150MM THICK GRADE C20/40 CONCRETE.

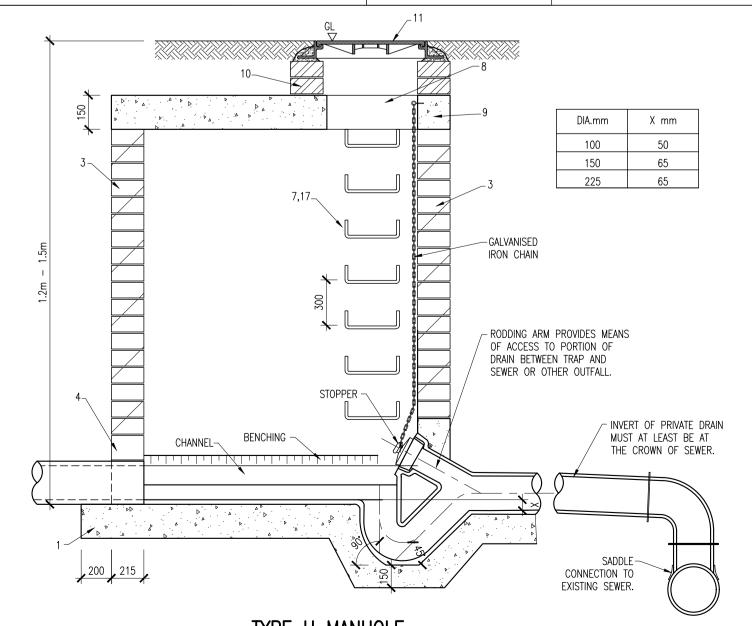

DETAIL 1D

TYPE H MANHOLE DETAIL OF MANHOLE WITH BROADS TRAP INTERCEPTOR **SCALE 1:25**

P02 06-09-21 REVISED FOR PLANNING P01 19-08-21 ISSUED FOR PLANNING A - Approved B - Approved with comments client approval C - Do not use

issue purpose

PLANNING

© COPYRIGHT OF THIS DRAWING IS RESERVED BY DBFL CONSULTING

SET OUT OR CONTAINED IN ANY DBFL SPECIFICATIONS OR DRAWINGS

LINEESS THE EXPRESS CONSENT HAS BEEN OBTAINED IN ADVANCE. IN

ACCORDANCE WITH NRA SPECIFICATION FOR

ROADWORKS UNLESS OVERRIDDEN BY GREATER

ALL DRAWINGS TO BE CHECKED BY CONTRACTOR

DLRCOCO REGIONAL CODES OF PRACTICE FOR

DRAINAGE WORKS AS AMENDED BY DLRCOCO

DISCREPANCIES BEFORE WORK COMMENCES.

3. ALL LEVELS ARE IN METRES AND ARE RELATED TO

CONTRACTOR SHALL SATISFY HIMSELF AS TO THE

ACCURACY OF PAVEMENT LEVELS ON SITE PRIOR

ALL SURFACE WATER MANHOLES TO BE TAKEN IN

CHARGE BY DCC TO BE BLOCKWORK OR IN SITU

WORKS AS AMENDED BY DLRCOCO CITY COUNCIL.

CONCRETE AS PER THE GREATER DLRCOCO REGIONAL CODES OF PRACTICE FRO DRAINAGE

ALL FOUL MANHOLES TO BE CONSTRUCTED IN

ACCORDANCE WITH IRISH WATER'S CODE OF

ALL MANHOLES TO BE RETAINED IN PRIVATE

OWNERSHIP TO BE PRE-CAST CONCRETE

PRACTICE FOR WASTEWATER INFRASTRUCTURE.

MANHOLES AS PER DRAINAGE DESIGN DETAILS.

ALL WORKS TO BE CONSTRUCTED IN

ON SITE AND ENGINEER INFORMED OF

THE ORDANANCE DATUM.

TO COMMENCEMENT OF WORKS.

THEIR WRITTEN PERMISSION.

CITY COUNCIL

WRITING, FROM DBFL.

NOTES:

ENGINEERS. NO PART SHALL BE REPRODUCED OR TRANSMITTED WITHOUT

NO CHANGES OF WHATSOEVER NATURE ARE TO BE MADE TO ANY DETAILS

S2 - INFORMATION DBFL Consulting Engineers

DUBLIN OFFICE: Ormond House, Upper Ormond Quay, Dublin 7. D07 W704 PHONE +353 1 400 4000

CORK OFFICE: 14 South Mall, Cork. T12 CT91 PHONE +353 21 2024538 WATERFORD OFFICE: Suite 8b The Atrium, Maritana Gate, Canada Street, Waterford. X91 W028 PHONE +353 51 309 500

TEDCASTLES SITE, DUN LAOGHAIRE

DRAINAGE DETAILS SHEET 1

TED LIVING

AS SHOWN TED-DBFL-CS-SP-DR-C-5201

DETAIL 1E